

**File 2 Ceiling 24W/m**

code F2206.840X/01





**PRODUCT DESCRIPTION**

Ceiling luminaire IP40/IP43, direct and diffused light. Body in extruded aluminum 6060, head in die-cast aluminum light proof, led SMD professional 24W/mt color temperature 4000K, assembled on rigid pcb with spray coating treatment for moisture protection, mounted and wired on ARS1 anodized aluminum extruded heatsink with additional transparent palsun protection to prevent contact to the LEDs during installation or maintenance, quick installation tools free by means of Click system with double-click harmonic steel springs for a first clamping to the profile that allows the wiring to the electrical network, to quick coupling without using screws. Integrated electronic power supply.

**PRODUCT SPECS**

Installation method	Ceiling surface mounted
Light source	LED
Absorbed power	51,2 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Microprismatic diffuser
Finishing	White
Luminous flux of the product	4210 lm
Luminous efficiency	82 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	On/Off
Energy efficiency class	E
Dimension	L2265 mm
IP Grade	Inst. Parete Ip40 / Inst. Soffitto Ip43
Power supply	220-240V 50-60Hz

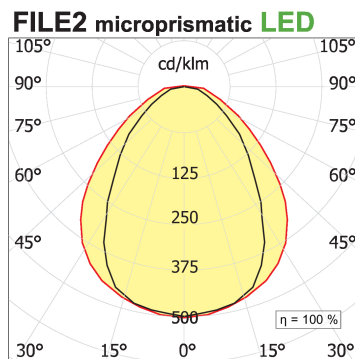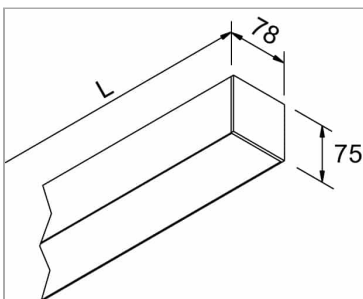

**WEB PAGE**



**ASSEMBLY INSTRUCTIONS**



