

**Minifile wall with opal diffuser**

code ML402.830D/01




**PRODUCT DESCRIPTION**

Wall-mounted luminaire for interiors with direct or indirect mono-directional light, diffused with LED source; equipped with a 62mmx32mm extruded aluminium structure, an opal polycarbonate screen and aluminium side caps in finish. degree of protection IP40. Protection class I.

**PRODUCT SPECS**

Installation method	Wall surface mounted
Light source	LED
Absorbed power	25,6 W
Color temperature	3000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	1442 lm
Luminous efficiency	56 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	Dimmable Dali
Energy efficiency class	E
Dimension	L1140 mm
IP Grade	IP40
Power supply	220-240V 50-60Hz

**MINIFILE opal LED**

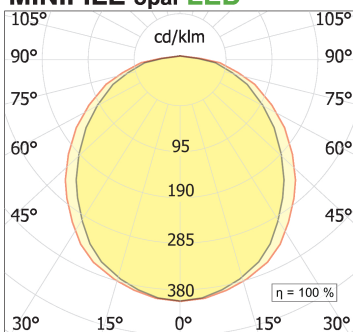

**WEB PAGE**



**ASSEMBLY INSTRUCTIONS**

