



code ML200.8TW/01

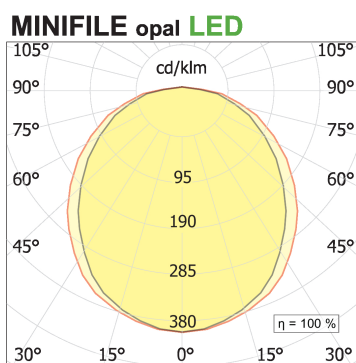

ceiling lamp LED with opaline diffuser

Installation method	Ceiling surface mounted
Light source	LED
Absorbed power	12,8 W
Color temperature	Tunable White
Color rendering index CRI	>90
Finishing	White
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80 B10
Protocol	On/Off
Energy efficiency class	E
Dimension	L580 mm
IP Grade	IP40
Power supply	220-240V 50-60Hz

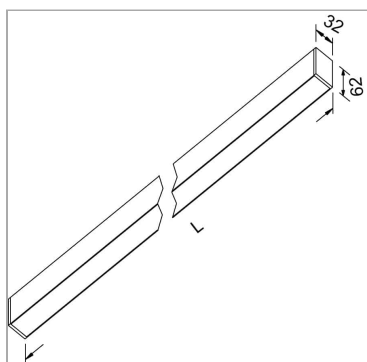

Page 1 / 2

OPTIONAL ACCESSORIES

Accessori Wallbox Couple of closure heads for wallbox MINIFILE



code LTM200.1

Ccouple of closure heads for wallbox minifile

Technical Sheet

