

Minifile Ceiling LED 3000K

code ML203.840D/01





PRODUCT DESCRIPTION

ceiling lamp LED with opaline diffuser

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	LED
Absorbed power	32 W
Color temperature	4000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	1857 lm
Luminous efficiency	58 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	Dimmable Dali
Energy efficiency class	E
Dimension	L1420 mm
IP Grade	IP40
Power supply	220-240V 50-60Hz

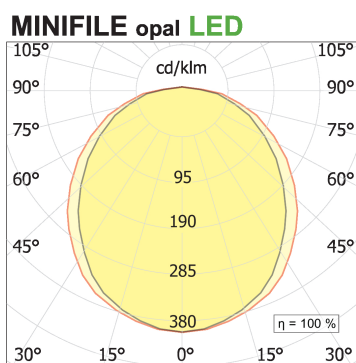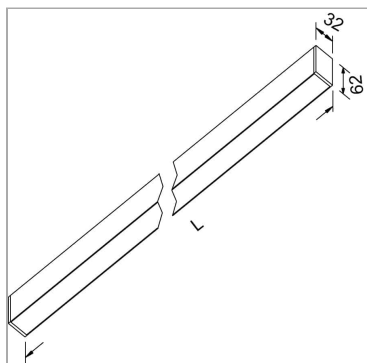

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 1 / 2

OPTIONAL ACCESSORIES

Accessori Wallbox Couple of closure heads for wallbox MINIFILE



code LTM200.1

Ccouple of closure heads for wallbox minifile

Technical Sheet

