

Nyx frame TF35F fixed for plasterboard

code NF010.927F/01





PRODUCT DESCRIPTION

Trimless, fixed round ceiling recessed luminaire. Light source in anti-glare recessed position. Painted aluminium body and optical unit. Remote power supply available as an accessory. Degree of protection IP20/IP54.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	5 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Flood 22°
Finishing	White
Luminous flux of the product	666 lm
Luminous efficiency	133 lm/W
MacAdam color tolerance	2
Life time estimate	50000h L90 B10 ta 25°C
Energy efficiency class	D
Weight	0.18 Kg
Dimension	H75 Ø60 mm
Hole size	Ø 55 mm
IP Grade	IP20/54
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

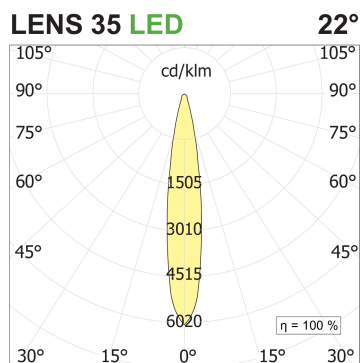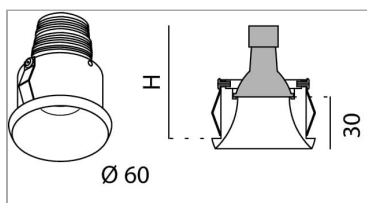

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

AE500.6C



code AE500.6C

Electronic power supply current