

Nyx frame TF35F fixed for plasterboard

code NF010.940F/01





PRODUCT DESCRIPTION

Trimless, fixed round ceiling recessed luminaire. Light source in anti-glare recessed position. Painted aluminium body and optical unit. Remote power supply available as an accessory. Degree of protection IP20/IP54.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	5 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 22°
Finishing	White
Luminous flux of the product	703 lm
Luminous efficiency	141 lm/W
MacAdam color tolerance	2
Life time estimate	50000h L90 B10 ta 25°C
Energy efficiency class	D
Weight	0.18 Kg
Dimension	H75 Ø60 mm
Hole size	Ø 55 mm
IP Grade	IP20/54
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

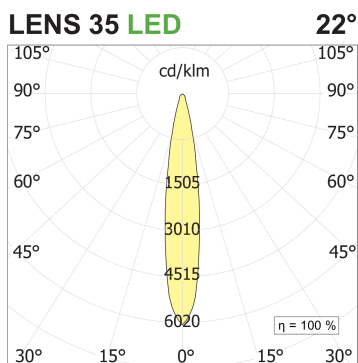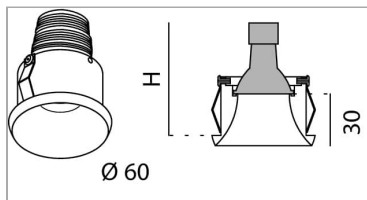

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.

Page 1 / 2

MANDATORY ACCESSORIES

AE500.6C



code AE500.6C

Electronic power supply current