

## Ipipedi Outdoor Wall R90A single emission

code PP521.930FD/01





### PRODUCT DESCRIPTION

indoor wall lighting fixture characterized by aluminium tubular section. Mono-emission version.

### PRODUCT SPECS

|                              |                              |
|------------------------------|------------------------------|
| Installation method          | Wall surface mounted         |
| Light source                 | LED                          |
| Absorbed power               | 17 W                         |
| Color temperature            | 3000K                        |
| Color rendering index CRI    | >90                          |
| Optic                        | Flood 24°                    |
| Finishing                    | White                        |
| Luminous flux of the product | 2114 lm                      |
| Luminous efficiency          | 124 lm/W                     |
| MacAdam color tolerance      | 3                            |
| Life time estimate           | 3SDCM 50000h L90 B10 ta 25°C |
| Protocol                     | Dimmable Dali                |
| Energy efficiency class      | D                            |
| Dimension                    | H204 Ø90 mm                  |
| IP Grade                     | IP54                         |
| Power supply                 | 220-240V 50-60Hz             |

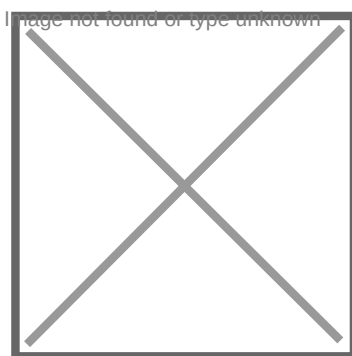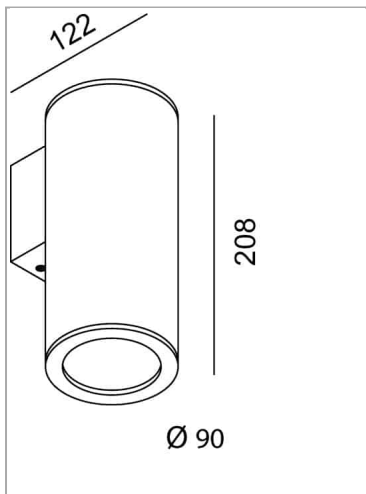

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.  
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.  
We reserve the right to make changes to our products at any time.

Page 1 / 1