
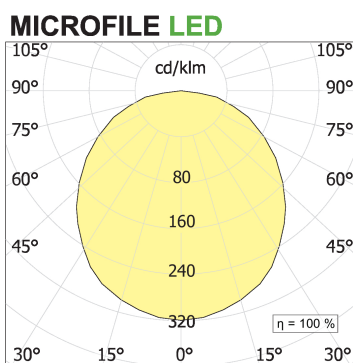


## Microfile Trimless Recessed

code MF052.830/01



### PRODUCT DESCRIPTION

Direct light recessed flush mounted made of extruded aluminum 6060, square section measuring 19,8x19,5 mm; complete with led; CRI color rendering index >90. Professional led modules 26.4 W assembled and wired; protocol vedi alimentatore. Epoxy powder coated, white color finish; complete with polycarbonate [diffusore] with diffusing film. Degree of protection IP40.

### PRODUCT SPECS

|                              |                     |
|------------------------------|---------------------|
| Installation method          | Trimless recessed   |
| Light source                 | Linea Led           |
| Absorbed power               | 26,4 W              |
| Color temperature            | 3000K               |
| Color rendering index CRI    | >80                 |
| Finishing                    | White               |
| Luminous flux of the product | 1324 lm             |
| Luminous efficiency          | 50 lm/W             |
| Protocol                     | On/Off              |
| Energy efficiency class      | D                   |
| Weight                       | 0.42 Kg             |
| Dimension                    | L1220 mm            |
| Hole size                    | 25xL+2 mm           |
| IP Grade                     | IP40                |
| Protection Class             | Class III appliance |
| Product Spec                 | Walk-over           |
| Power supply/Transformer     | Not included        |
| Protocol                     | See power supply    |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



