
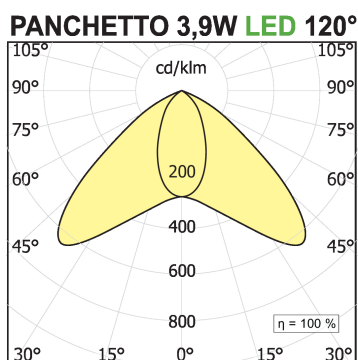


Panchetto Outdoor

code IC410.830

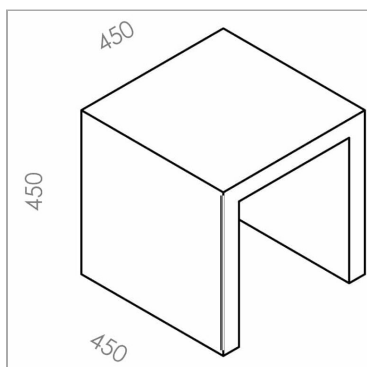

PRODUCT DESCRIPTION

LED floor luminaire, for street furniture and orientation and service lighting, opal diffuser. Body in CementoPiuma, lightweight fibreglass cement, with "smoothed concrete" finish made by hand. Aluminium optical group complete with 10W/mt LED source, integrated electronic power supply. Voltage In 220/240V 50/60hz and steel mounting plate for ground fixing, with anti-theft lock. Also available in non-electrified version. Degree of protection IP65. Seat complies with UNI 11306 of 02.2009. WARNING: This product has been realized with hand crafted procedures and not industrial. Small imperfections, empty, subsidence and ripples of the surface are deliberately present and they are a feature of the product, proving the hand-made manufacturing procedure.

PRODUCT SPECS

Installation method	Floor
Light source	LED
Absorbed power	3,9 W
Color temperature	3000K
Color rendering index CRI	>80
Luminous flux of the product	413 lm
Luminous efficiency	106 lm/W
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	D
Weight	25 Kg
Dimension	L450xW450xH450 mm
IP Grade	IP65
Power supply	220-240V 50-60Hz

WEB PAGE



ASSEMBLY INSTRUCTIONS



