

## File Flex Circle Ceiling Diffused

code FXA38.840/01





### PRODUCT DESCRIPTION

Registered design

### PRODUCT SPECS

|                              |                         |
|------------------------------|-------------------------|
| Installation method          | Ceiling surface mounted |
| Light source                 | LED                     |
| Absorbed power               | 203 W                   |
| Color temperature            | 4000K                   |
| Color rendering index CRI    | >90                     |
| Finishing                    | White                   |
| Luminous flux of the product | 11901 lm                |
| Luminous efficiency          | 59 lm/W                 |
| MacAdam color tolerance      | 3                       |
| Protocol                     | On/Off                  |
| Energy efficiency class      | D                       |
| Weight                       | 14.8 Kg                 |
| Dimension                    | Ø3000 mm                |
| IP Grade                     | IP40                    |
| Protection Class             | Class III appliance     |
| Product Spec                 | Circular shape          |
| Power supply/Transformer     | Not included            |
| Protocol                     | See power supply        |

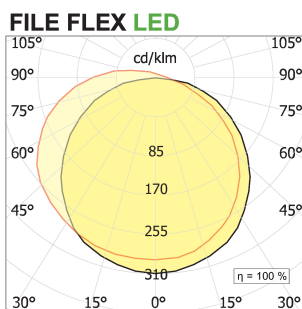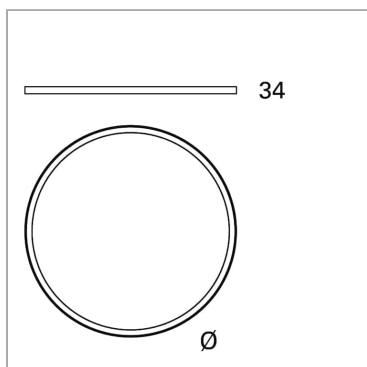

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



