

File Flex Suspension Circle Diffused


















code FXA44.840/01

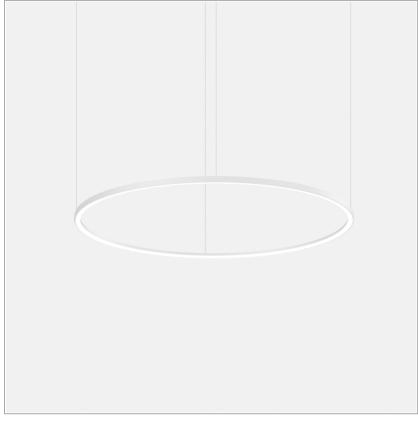



PRODUCT DESCRIPTION

Circular shape indoor suspension lamp made of extruded 6060 aluminum, direct and diffuse light emission, complete with led 81 W, color rendering index CRI>90. Transparent round section power cable; suspension cables made of steel with millimetric regulator; Epoxy powder coating; Microtextured color white.

PRODUCT SPECS

Installation method	Suspension
Light source	LED
Absorbed power	81 W
Color temperature	4000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	4683 lm
Luminous efficiency	58 lm/W
MacAdam color tolerance	3
Energy efficiency class	D
Weight	5.9 Kg
Dimension	Ø1200 mm
IP Grade	IP40
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply





WEB PAGE



ASSEMBLY



MANDATORY ACCESSORIES

Electronic power supply



code AE50.24V uncategorized



Electronic power supply



code AE100.3.24V Electronic power supply



Electonic power supply



code AE150.24VIP uncategorized



Electronic power supply (Copia)



code AE200.24VIP uncategorized



Electronic power supply (Copia)



code AE200.24VIP uncategorized



Electronic power supply (Copia)

code AE100.2.24V



Electronic power supply

OPTIONAL ACCESSORIES

CANOPY CONNECTION



code LB420/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.



Lbs System Canopy for housing driver



code LB421/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.



Lbs System Canopy for plasterboard false-ceiling

Lbs System Canopy for plasterboard false-ceiling



code LB428/01

Lbs System Canopy for plasterboard false-ceiling



