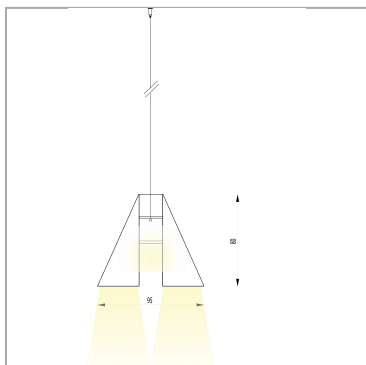
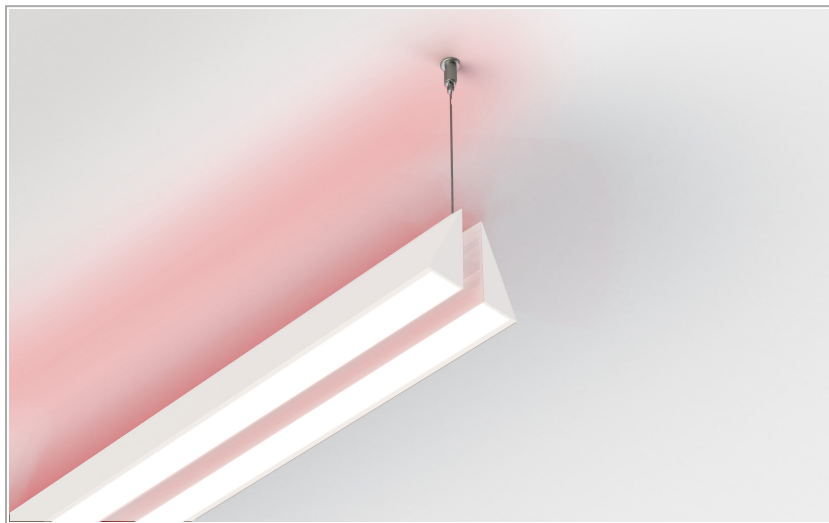


**Flik suspension double emission
white direct and RGB indiret light**

code FF34.827/01

**PRODUCT DESCRIPTION**

Series of wall-mounted fixtures for direct or indirect lighting, complete with integrated linear LED sources. To be completed with driver, to be installed remote. Body in extruded aluminium, painted finish. Double installation possibility: if fixed by the narrow side, the lighting effect is diffused, if fixed instead by the wide side, the lighting is grazing. Complete with Light Proof system side-end caps, opal white polycarbonate diffuser and mounting brackets. IP65 Degree of protection.

PRODUCT SPECS

Installation method	Suspension
Light source	Linea Led
Absorbed power	20,4 W / 12 W
Color temperature	2700K
Color rendering index CRI	>80 / >90
Finishing	White
Luminous flux of the product	1252 lm / 1 lm
Luminous efficiency	61 lm/W / 0 lm/W
MacAdam color tolerance	3
Dimension	L850 mm
IP Grade	IP40
Protection Class	Class III appliance
Power supply	220-240V 50-60Hz

WEB PAGE

