

Fifty5 System - Reglette LED Pro

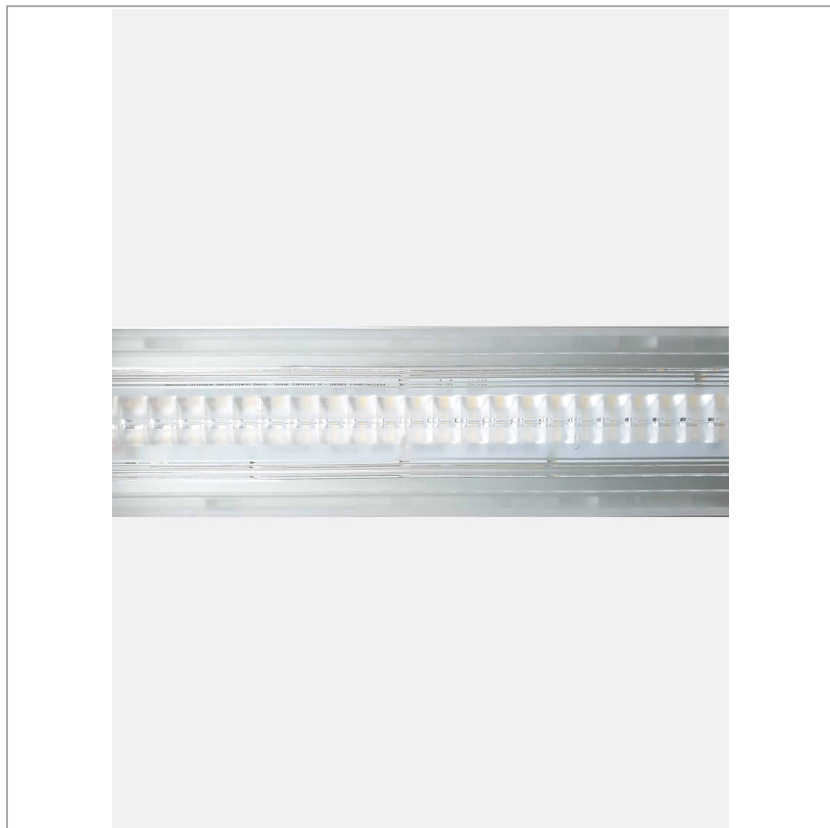
code FT055.930EWD

**PRODUCT DESCRIPTION**

Modular system, in extruded aluminum 55x55mm, for ceiling installation, suspension and recessed trimless (through the use of special accessories) to complete with the necessary dedicated accessories. Textured or anodized painted finish. Diffused light screens in opal polycarbonate, professional optics with different beam openings and, if necessary, equipped with spectra for horticulture and tunable white TW. Possibility of insertion of anti-glare eyelid with patent pending attachment system. Degree of protection IP40

PRODUCT SPECS

Installation method	system
Light source	LED
Absorbed power	70,2 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Extra wide 110
Luminous flux of the product	11400 lm
Luminous efficiency	162 lm/W
Protocol	Dimmable Dali
Energy efficiency class	D
Dimension	L1690 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

**WEB PAGE****ASSEMBLY INSTRUCTIONS**