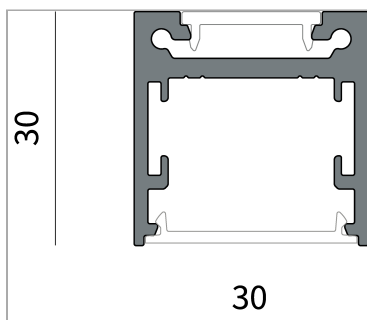
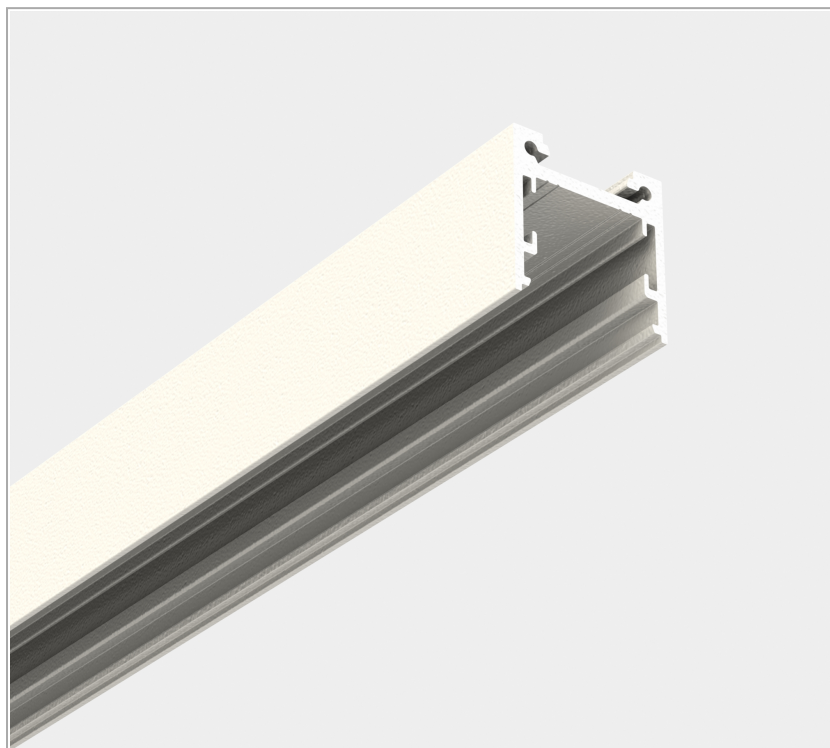


File 30 system - Empty profile

code F310.2000/01

**PRODUCT DESCRIPTION**

Extrusion aluminium profile 6060, square section measuring 30x30 mm epoxy powder coated white, cut to 2000 mm for ceiling installation, suspension and flush mounting. In the pendant version it is also possible to have indirect light emission.

PRODUCT SPECS

Installation method	system
Finishing	White
Weight	1.86 Kg
Dimension	L2000 mm

WEB PAGE**ASSEMBLY INSTRUCTIONS**

OPTIONAL ACCESSORIES

Couple of closure File 30




code F3121/01

Modular system of 30X30 mm single and bi-emission extruded aluminium profiles, for recessed, ceiling and suspension installation, with LED linear sources and 230/240V electronic ballasts. Its dimensions make it suitable for installation on radiant ceilings by means of appropriate bracket. Painted finish. Diffuser screens in opal polycarbonate and side closing heads with Light Proof system. Degree of protection IP20/ IP40.

Technical Sheet



Linear joint couple




code LTM211

Modular system of 30X30 mm single and bi-emission extruded aluminium profiles, for recessed, ceiling and suspension installation, with LED linear sources and 230/240V electronic ballasts. Its dimensions make it suitable for installation on radiant ceilings by means of appropriate bracket. Painted finish. Diffuser screens in opal polycarbonate and side closing heads with Light Proof system. Degree of protection IP20/ IP40.

Technical Sheet



Angle connector couple



code LTM211.90

Trimless, fully-retracting flush recessed modular systems for housing system profiles and MINIFILE, FILE, FILE 2, FILE 2 COMPLEMENTI, LEVA and FARETÈN finished modules for creating cuts of continuous light or where light modules alternate to voids, in plaster-board false-ceiling or false-walls or in concrete or brick walls. Painted or anodised extruded aluminium body, with a predefined length or cut to size. To be completed with side end caps and finishing cover for the empty spaces in a retracted position to determine an effect of solids and voids. Can also be used with LED linear light sources, to be completed with opal white PC diffusing screen and remote power supplies, to create retracted grooves of light.

Technical Sheet



Angle connector couple wall/ceiling



code LTM211.90P

for wall/ceiling assembling

Technical Sheet



File 30 system – Magnetic fixing kit for plasterboard



code F3123

One every meter

Technical Sheet



Microfile System Surface mounting kit



code MF00DP.1000

Modular system of 30X30 mm single and bi-emission extruded aluminium profiles, for recessed, ceiling and suspension installation, with LED linear sources and 230/240V electronic ballasts. Its dimensions make it suitable for installation on radiant ceilings by means of appropriate bracket. Painted finish. Diffuser screens in opal polycarbonate and side closing heads with Light Proof system. Degree of protection IP20/ IP40.

Technical Sheet



code MF00DP.2000

Modular system of 30X30 mm single and bi-emission extruded aluminium profiles, for recessed, ceiling and suspension installation, with LED linear sources and 230/240V electronic ballasts. Its dimensions make it suitable for installation on radiant ceilings by means of appropriate bracket. Painted finish. Diffuser screens in opal polycarbonate and side closing heads with Light Proof system. Degree of protection IP20/ IP40.

Technical Sheet



code MF00DP.3000

Modular system of 30X30 mm single and bi-emission extruded aluminium profiles, for recessed, ceiling and suspension installation, with LED linear sources and 230/240V electronic ballasts. Its dimensions make it suitable for installation on radiant ceilings by means of appropriate bracket. Painted finish. Diffuser screens in opal polycarbonate and side closing heads with Light Proof system. Degree of protection IP20/ IP40.

Technical Sheet



Microfile H system – Power cable kit with ceiling canopy



code MFH01S/01

Modular system of 30X30 mm single and bi-emission extruded aluminium profiles, for recessed, ceiling and suspension installation, with LED linear sources and 230/240V electronic ballasts. Its dimensions make it suitable for installation on radiant ceilings by means of appropriate bracket. Painted finish. Diffuser screens in opal polycarbonate and side closing heads with Light Proof system. Degree of protection IP20/ IP40.

Technical Sheet



File 30 system – Opal white direct diffuser



code F311P.1000

27x4 mm opal polycarbonate extruded profile with "U" section cut to size 1000

Technical Sheet



code F311P.2000

27x4 mm opal polycarbonate extruded profile with "U" section cut to size 2000

Technical Sheet



code F311P.3000

27x4 mm opal polycarbonate extruded profile with "U" section cut to size 3000

Technical Sheet



code F311P.misura

27x4 mm opal polycarbonate extruded profile with "U" section cut to size -----

Technical Sheet



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

File 30 system – Microprismatic polycarbonate diffuser



code F311X.1000

Extruded polycarbonate profile with surface microprism finish 27x4 mm with section type "U" cut to mm 1000

Technical Sheet



code F311X.2000

Extruded polycarbonate profile with surface microprism finish 27x4 mm with section type "U" cut to mm 2000

Technical Sheet



code F311X.3000

Extruded polycarbonate profile with surface microprism finish 27x4 mm with section type "U" cut to mm 3000

Technical Sheet



code F311X.misura

Extruded polycarbonate profile with surface microprism finish 27x4 mm with section type "U" cut on request to measure mm max 6000

Technical Sheet



File 30 system – Microfile H System Kit Suspension



code F3122

Modular system of 30x30 mm single and bi-emission extruded aluminium profiles, for recessed, ceiling and suspension installation, with LED linear sources and 230/240V electronic ballasts. Its dimensions make it suitable for installation on radiant ceilings by means of appropriate bracket. Painted finish. Diffuser screens in opal polycarbonate and side closing heads with Light Proof system. Degree of protection IP20/ IP40.

Technical Sheet



Diffuser opal direct/indirect depending on family

Opal diffuser direct for Microfile, indirect for File 30 and Pro Edge, direct/indirect for Microfile H



code MF00P.1000

Square section 6060 aluminium extrusion profile square section measuring 30x30 mm powder-coated colour epoxy powder coated, cut to 1000 mm for ceiling installation, suspension and flush mounting. In the suspension version it is also possible to have indirect light emission.

Technical Sheet





code MF00P.2000

Square section 6060 aluminium extrusion profile square section measuring 30x30 mm powder-coated colour epoxy powder coated, cut to 2000 mm for ceiling installation, suspension and flush mounting. In the suspension version it is also possible to have indirect light emission.

Technical Sheet



code MF00P.3000

Square section 6060 aluminium extrusion profile square section measuring 30x30 mm powder-coated colour epoxy powder coated, cut to 3000 mm for ceiling installation, suspension and flush mounting. In the suspension version it is also possible to have indirect light emission.

Technical Sheet



code MF00P.misura

Square section 6060 aluminium extrusion profile square section measuring 30x30 mm powder-coated colour epoxy powder coated, cut to mm for ceiling installation, suspension and flush mounting. In the suspension version it is also possible to have indirect light emission.

Technical Sheet

