

## Cubotti PC - mini track

code CB102.940FD/01




### PRODUCT DESCRIPTION

Collection of luminaires for a 24V/48V track lighting. Direct light luminaires. Available in a ceiling-mounted version or in a built-in version for ceiling-mounted effect. Square-section body in extruded aluminium with painted finish. IP20 protection rating.

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | Mini Track                  |
| Light source                 | LED                         |
| Absorbed power               | 8 W                         |
| Color temperature            | 4000K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Flood 27°                   |
| Finishing                    | White                       |
| Luminous flux of the product | 873 lm                      |
| Luminous efficiency          | 109 lm/W                    |
| MacAdam color tolerance      | 2                           |
| Life time estimate           | 2SCDM 50.000h L90 B10 ta25° |
| Protocol                     | Dimmable Dali               |
| Energy efficiency class      | D                           |
| Weight                       | -0.72 Kg                    |
| Dimension                    | L70x70xH110 mm              |
| IP Grade                     | IP20                        |
| Protection Class             | Class III appliance         |
| Power supply/Transformer     | Not included                |
| Protocol                     | See power supply            |

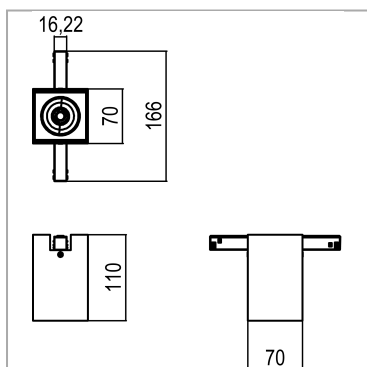

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

