

Ibrida ground luce 2 spots e indirect

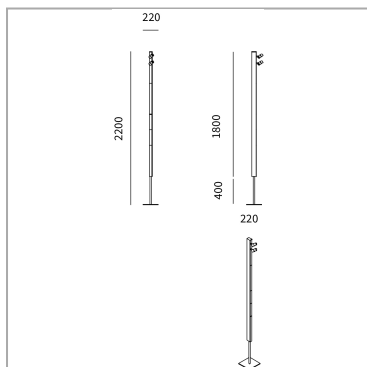
code IB012.927ZD/01

**PRODUCT DESCRIPTION**

Ground lamp h 2200, base 220x220 mm. Characterized by an extruded aluminum profile. Led line 16 W with two spots and indirect light. Power supply included. Color white finish. Protection class IP20.

PRODUCT SPECS

Installation method	Floor
Light source	LED
Absorbed power	2x8 W / 17 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Asymmetric 41°X18°
Finishing	White
Luminous flux of the product	980 lm
Luminous efficiency	61 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Protocol	Dimmable Dali
Energy efficiency class	D
Dimension	L220xH2200 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

**WEB PAGE****ASSEMBLY INSTRUCTIONS**

