

Ibrida ground light 3 spots and indirect

code IB013.935ZD/01





PRODUCT DESCRIPTION

Ground lamp h 2200, base 220x220 mm. Characterized by an extruded aluminum profile. Led line 24 W with two spots. Power supply included. Color white finish. Protection class IP20.

PRODUCT SPECS

Installation method	Floor
Light source	LED
Absorbed power	3x8 W / 17 W
Color temperature	3500K
Color rendering index CRI	>90
Optic	Asymmetric 18°x38°
Finishing	White
Luminous flux of the product	1552 lm
Luminous efficiency	65 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Protocol	Dimmable Dali
Energy efficiency class	D
Dimension	L220x220xH2200 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

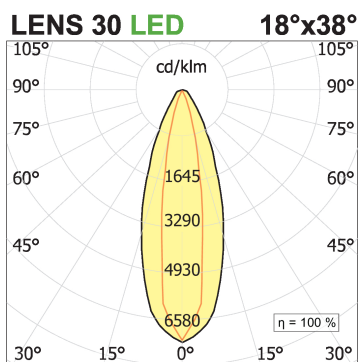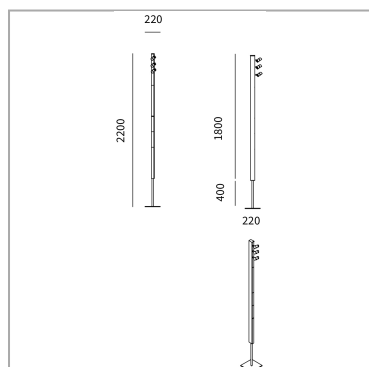

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 1 / 2

