


IFerrosi straight pole H3500-60 +60

code IF07.940W/99

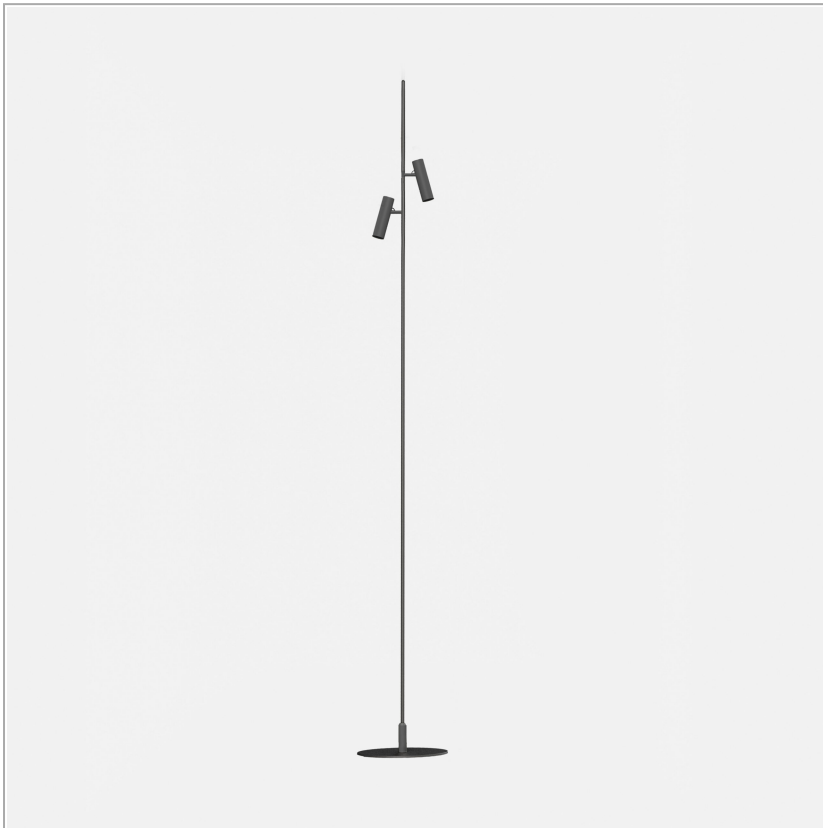


PRODUCT DESCRIPTION

Outdoor floor lamp consisting of a tubular H3500mm. Base diameter 450 mm, complete with 2 Ø60 spots. colour rendering index cri>90. Painted finish of graphitecolour . IP66 degree of protection.

PRODUCT SPECS

| | |
|------------------------------|---------------------------------|
| Installation method | Floor |
| Light source | LED |
| Absorbed power | 2x6,7 W |
| Color temperature | 4000K |
| Color rendering index CRI | >90 |
| Optic | Wide 38° |
| Finishing | Graphite |
| Luminous flux of the product | 990 lm |
| Luminous efficiency | 74 lm/W |
| MacAdam color tolerance | 3 |
| Life time estimate | 3SDCM 50000h L90 B10 Ta 25°C |
| Energy efficiency class | D |
| Weight | 16.5 Kg |
| Dimension | L450xW760xH3500 Ø60 mm |
| IP Grade | Ip66 |

IFERROSI 60 6,7W LED38°

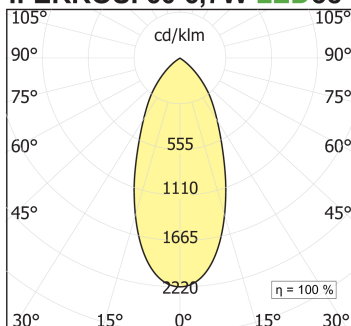

WEB PAGE




ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

box-for-power-suppliers IFerrosi system

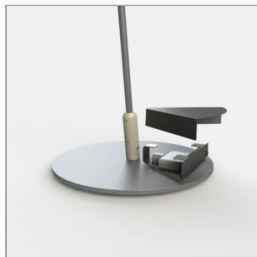

code IF76/99

Family of outdoor floor or wall luminaires, available in finished modules or in a modular system for maximum customization. Versions with LED source projectors for accent light are available. Poles of different heights from 700mm to 3000mm are available, to be combined with spots of 6.7W or 18W. Fixing base or possibility to install in different surfaces: flange for wooden surfaces, clamp for concrete and stake for ground. IP54.

Technical Sheet

