

Nyx Frame TF50F Fixed for plasterboard

code NF024.930F/01





PRODUCT DESCRIPTION

Recessed ceiling luminaire with round frame, with fixed optics for accent and diffuse lighting. Light source in back anti-glare position. Available in versions for plasterboard installation. With integrated LED source with 99.9% pure aluminium metallic reflector. Body and body in painted aluminum. Remote power available as an accessory. IP20/IP54. Insulation class III.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	8 W / 12 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	1048 lm / 1285 lm
Luminous efficiency	131 lm/W / 107 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Weight	-0.75 Kg
Dimension	H101 Ø75 mm
Hole size	70 mm
IP Grade	IP20/54
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

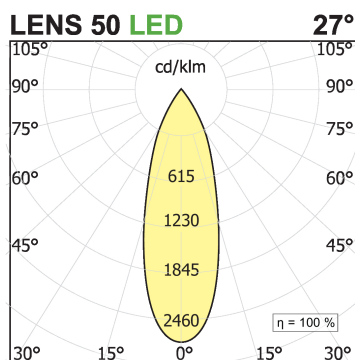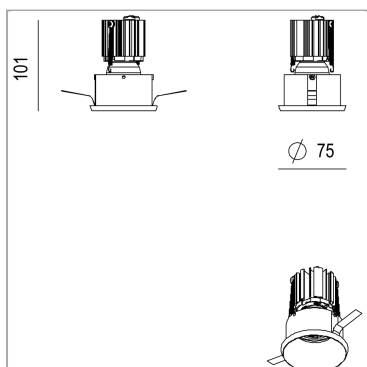

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

MANDATORY ACCESSORIES

AE350.16C (Copia)



code AE350.15C

Electronic power supply current

AE500.20C1



code AE500.20C1

Electronic power supply current

OPTIONAL ACCESSORIES

Accessori Lens ø 50 Elissoidal lens Ø 50



code L050E


uncategorized

Warning: Not suitable with halogen lamp

Technical Sheet



Accessori Lens ø 50 Asymmetric lens Ø 50



code L050A

uncategorized

Warning: Not suitable with halogen lamp

Technical Sheet



Accessori Lens ø 50 Honey comb Ø 50



code L050R

uncategorized

Technical Sheet

