
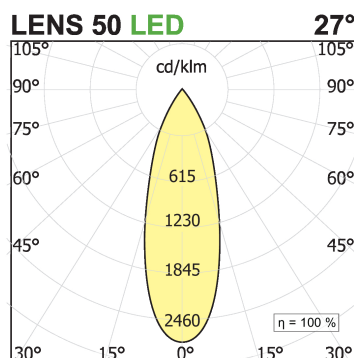
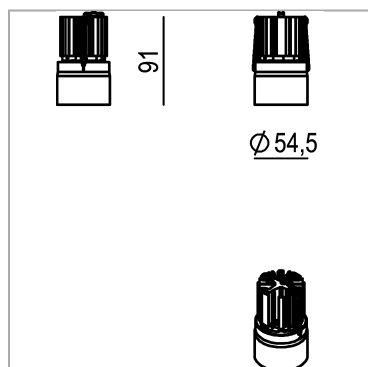


Nyx Frame TF50D Directional for plasterboard

code NF031.940F/01

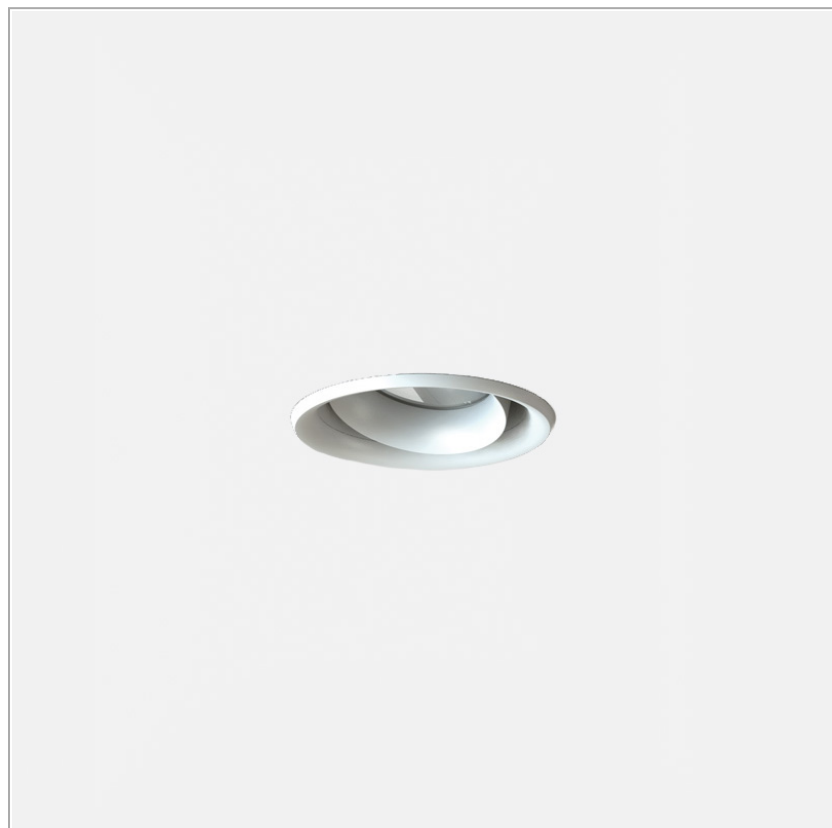

PRODUCT DESCRIPTION

Round or square, fix or directional, trimless recessed downlight for ceiling installation, for accentor diffused lighting. Light source in recessed position for anti-glare lighting. Available both in plasterboard false-ceiling and in concrete/brick wall installation version. For integrated LED source or for 12V/230V QR-CB 35, QR-CB 51 and QR-LP 111 or 230V QPAR16 GU10 halogen/led lamps. Body and optical group in painted aluminum. Version with Integrated Chip On Board LED source provided with 99,99% pure aluminum coated reflector. Directional versions: optical group adjustable 355° horizontally and +/- 20° vertically. Remote power-supply available as an accessory. Degree of protection IP20/IP23/IP54.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	8 W / 12 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	1064 lm / 1333 lm
Luminous efficiency	133 lm/W / 111 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Weight	0.35 Kg
Dimension	H94 Ø54.5 mm
Hole size	85 mm
IP Grade	IP20/54
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

AE350.16C (Copia)




code AE350.15C

Electronic power supply current

OPTIONAL ACCESSORIES

Accessori Lens ø 50 Elissoidal lens Ø 50



code L050E


uncategorized

Warning: Not suitable with halogen lamp

Technical Sheet



Accessori Lens ø 50 Asymmetric lens Ø 50



code L050A


uncategorized

Warning: Not suitable with halogen lamp

Technical Sheet



Accessori Lens ø 50 Honey comb Ø 50



code L050R

uncategorized

Technical Sheet

