

Nyx Trimless fixed Q50 - optic group

code LTN88K.940S/01




PRODUCT DESCRIPTION

Wall/ceiling recessed lamp, square section, direct light. Possibility to install total recessed or semi recessed

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	8 W / 12 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Spot 15°
Finishing	White
Luminous flux of the product	1064 lm / 1400 lm
Luminous efficiency	133 lm/W / 117 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Weight	0.19 Kg
Dimension	H73 Ø60 mm
Hole size	74x74 mm
IP Grade	IP20/54
Protection Class	Class III appliance
Product Spec	Square shape
Power supply/Transformer	Not included
Protocol	See power supply

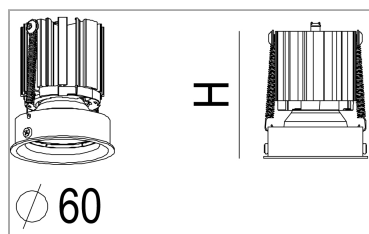

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.


Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

MANDATORY ACCESSORIES

Accessori Outer Casing Nyxq For False Ceiling Q50 outer casing for plasterbord




code LTN02A/01

Trimless recessed indoor outer casing for plasterboard. Bianco finishing outer casing for plasterboard

Technical Sheet



Accessori Wallbox Nyx For Brickwall Q50 outer casing for brick wall



code LTN02B/01

Trimless recessed indoor outer casing for plasterboard square shape. Bianco finishing outer casing for plasterboard

Technical Sheet



AE350.16C (Copia)



code AE350.15C

Electronic power supply current

AE500.20C1



code AE500.20C1

Electronic power supply current