

## Zero51 suspension

code IC222.840




### PRODUCT DESCRIPTION


Hanging appliance for direct diffused interior lighting, for LED source lamps. Body in CementoPiuma, lightweight fiber concrete, with "smoothed concrete" hand- crafted finishing. Diffusing screen in white opaline PMMA. Built-in electronic driver 50/60Hz 230/240V. Equipped with suspension system 4000 mm. with millimetric adjustment. Maintenance by removing the diffuser without the use of tools. Degree of protection IP40.

### PRODUCT SPECS

|                              |                        |
|------------------------------|------------------------|
| Installation method          | Suspension             |
| Light source                 | LED                    |
| Absorbed power               | 168 W                  |
| Color temperature            | 4000K                  |
| Color rendering index CRI    | 80                     |
| Luminous flux of the product | 12692 lm               |
| Luminous efficiency          | 76 lm/W                |
| Life time estimate           | 50000h L90 B10 Ta 25°C |
| Protocol                     | On/Off                 |
| Energy efficiency class      | E                      |
| Weight                       | 41 Kg                  |
| Dimension                    | H150 Ø1300 mm          |
| Product Spec                 | Circular shape         |
| Power supply                 | 220-240V 50-60Hz       |

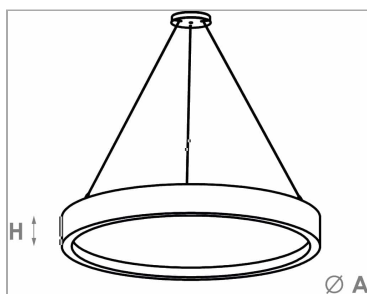

### ZERO51 LED

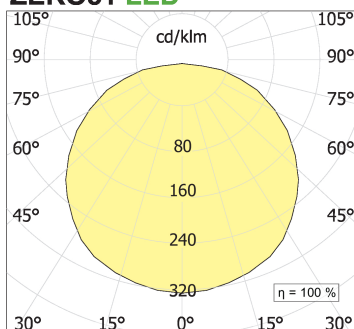

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



