


IFerrosi system - Element spot 120

code IF50.930W/44C


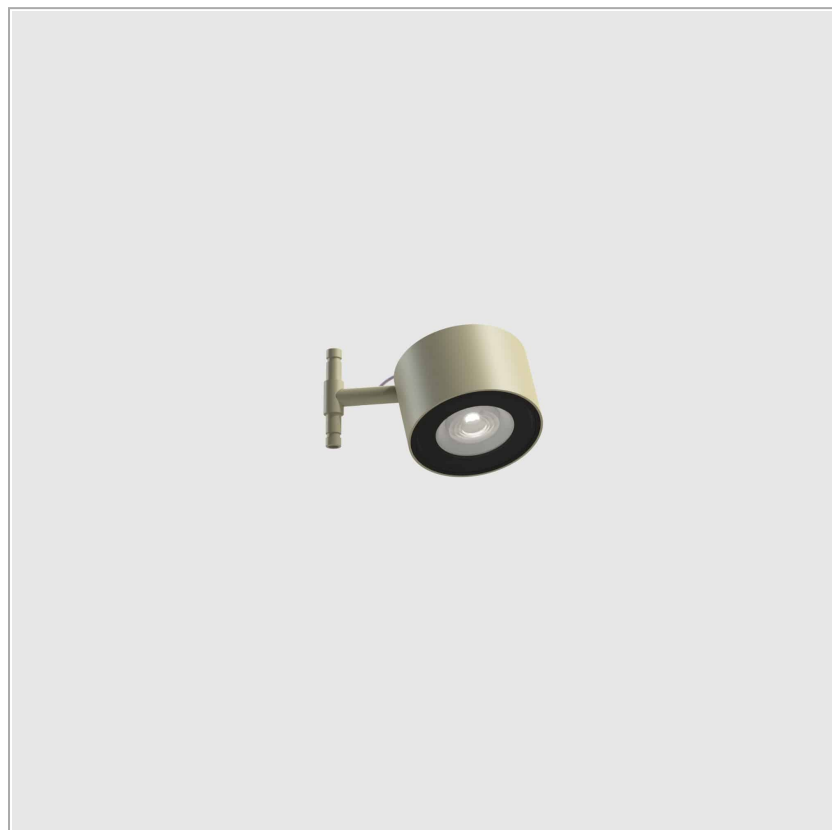


PRODUCT DESCRIPTION

Family of outdoor floor or wall luminaires, available in a modular system for maximum customization. Versions with LED source for accent light are available. Poles of different heights from 700mm to 3000mm are available, to be combined with spots of 6.7W or 18W. Fixing base or possibility to install in different surfaces: flange for wooden surfaces, clamp for concrete and stake for ground. IP54.

PRODUCT SPECS

Installation method	system
Light source	LED
Absorbed power	18 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Wide 39°
Finishing	Champagne gold
Luminous flux of the product	1506 lm
Luminous efficiency	84 lm/W
Life time estimate	50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	D
Weight	1.3 Kg
Dimension	Ø120 mm
IP Grade	IP54
Protection Class	Class III appliance
Product Spec	Adjustable
Power supply/Transformer	Not included
Protocol	See power supply

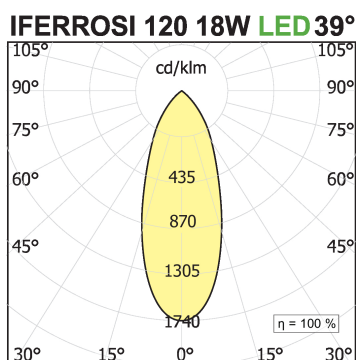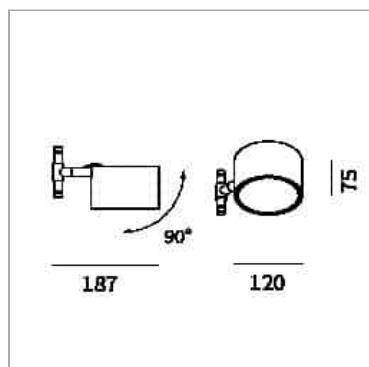

WEB PAGE



ASSEMBLY INSTRUCTIONS

