
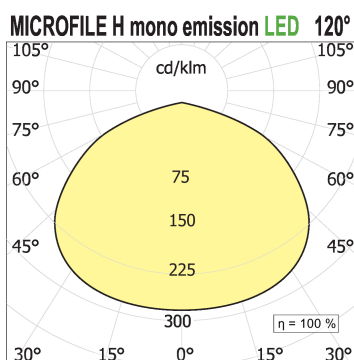
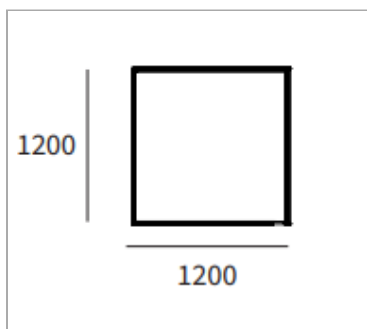


Microfile H square ceiling

code MFH222.830/01

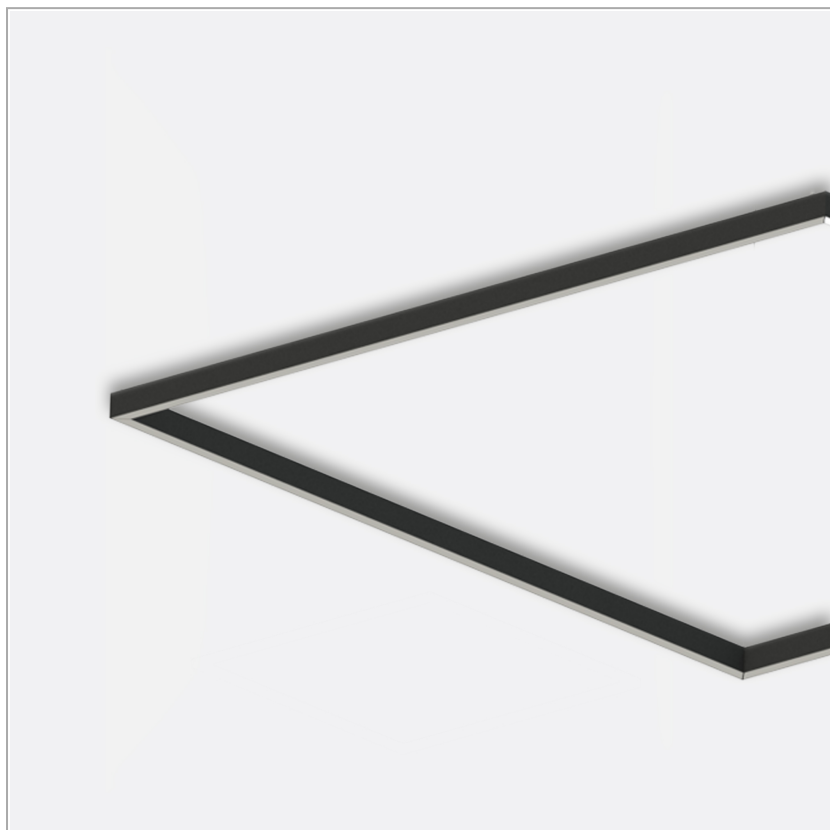

PRODUCT DESCRIPTION

Lighting body composed of extruded profile of aluminum section 20x34,5mm square shape 1200 X 1200mm, ceiling installation for direct floodlighting, complete with silicone screen, epoxy powder coated in the white version. 50W LED linear source to be completed with 24vdc remote power supply. Degree of protection IP44. Sorgente lineare LED 100 WW to be completed with 24Vdc remote power supply. Degree of protection IP44.

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	LED
Absorbed power	100 W
Color temperature	3000K
Color rendering index CRI	>80
Finishing	White
Luminous flux of the product	12166 lm
Luminous efficiency	122 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Energy efficiency class	D
Weight	3.8 Kg
Dimension	L1200xW1200 mm
IP Grade	Ip44
Protection Class	Class III appliance
Product Spec	Square shape
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Lbs System Canopy for housing driver



code LB421/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Technical Sheet



Lbs System Canopy for plasterboard false-ceiling

Lbs System Canopy for plasterboard false-ceiling



code LB428/01

Lbs System Canopy for plasterboard false-ceiling

Technical Sheet

