
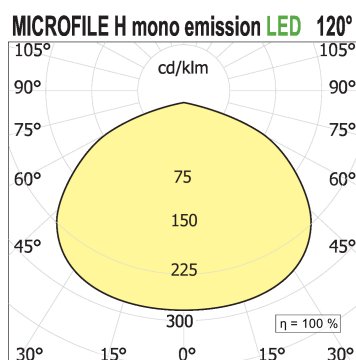
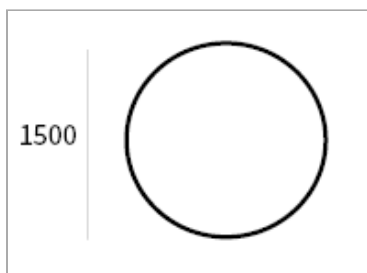
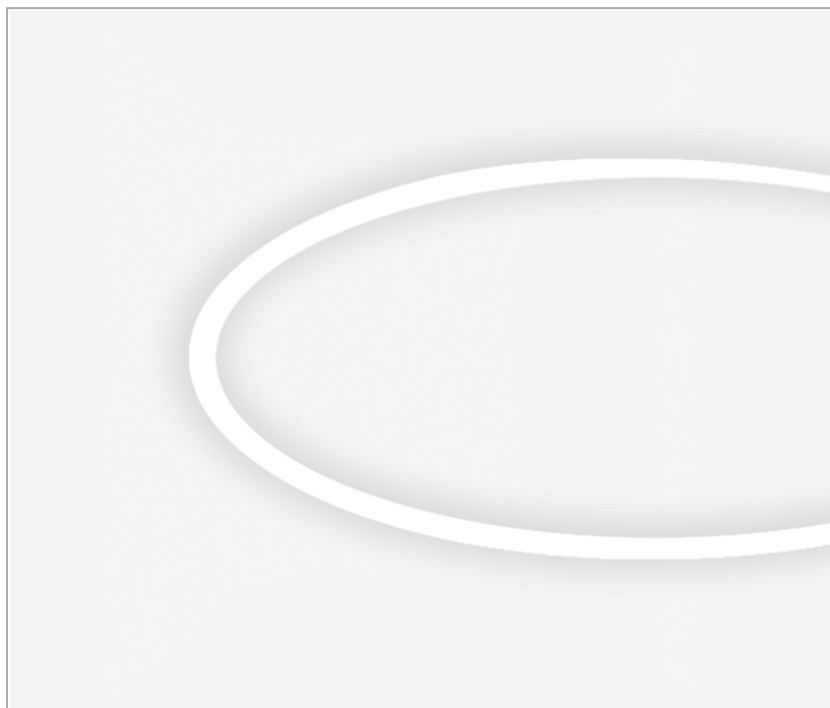


Microfile H circle recessed

code MFH312.827/01



PRODUCT DESCRIPTION

Lighting body composed of extruded aluminium profile section 20x34,5mm of circular shape, 1506, recessed installation for direct floodlighting, complete with silicone screen, epoxy powder coated version white. Sorgente lineare LED 100 WW to be completed with 24Vdc remote power supply. Degree of protection IP44.

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	100 W
Color temperature	2700K
Color rendering index CRI	>80
Finishing	White
Luminous flux of the product	12106 lm
Luminous efficiency	121 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Energy efficiency class	D
Weight	4 Kg
Dimension	Ø1506 mm
IP Grade	Ip44
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Lbs System Canopy for housing driver



code LB421/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Technical Sheet



Lbs System Canopy for plasterboard false-ceiling

Lbs System Canopy for plasterboard false-ceiling



code LB428/01

Lbs System Canopy for plasterboard false-ceiling

Technical Sheet

