

Leva 5 Outdoor trimless Recessed -

Ε





PRODUCT DESCRIPTION






Luminaire for integrated LED Chip On Board sources. Flush-mounted installation. Luminaire body in extruded painted aluminium white. Optical groups complete with LED chip on board, lens, anti-glare housing. Optical UGR<16.









code LV005P.935Z/01

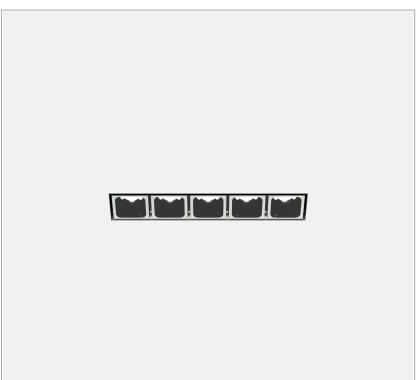

PRODUCT SPECS Installation method

Installation method	Trimless recessed
Light source	LED
Absorbed power	5x2,2 W
Color temperature	3500K
Color rendering index CRI	>90
Optic	Asymmetric
Finishing	White
Luminous flux of the product	1180 lm
Luminous efficiency	107 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Energy efficiency class	E
Weight	0.10 Kg
Dimension	L150xW27xH60 mm
IP Grade	lp56
Protection Class	Class III appliance
Product Spec	Rectangular shape
Power supply/Transformer	Not included
Protocol	See power supply





WEB PAGE



ASSEMBLY



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres. Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.

MANDATORY ACCESSORIES

Accessories Leva Trimless box 5



code LV005A

Trimless recessed indoor wallbox for false ceiling



OPTIONAL ACCESSORIES

Wallbox for brick wall and concrete - Leva5



code CCLV05

Formwork for masonry and concrete, suitable for Leva5. Internal length 157mm - external length 159,4mm



